

# 锂电池 UN38.3 测试报告

## Lithium Battery UN38.3 Test Report

报告编号 : AGC01749190705UA01  
Report No.

产品名称 : 锂离子动力电池  
PRODUCT DESIGNATION : Lithium-ion Power Battery

商 标 : N/A  
Brand Name

样品型号 : 10S4P  
MODEL NAME

委托单位 : 深圳市杰特能源科技有限公司  
APPLICANT : Shenzhen JETECH Energy Technology Co., Ltd.

签发日期 : 2019-07-29  
DATE OF ISSUE

检测标准 : 《联合国关于危险品运输建议书—试验和标准手册》  
(ST/SG/AC.10/11/Rev.6)  
STANDARD(S) : <United Nations Recommendations on the Transport of Dangerous Goods: Manual of Tests and Criteria>

报告版本 : V1.0  
REPORT VERSION

深圳市鑫宇环检测有限公司

Attestation of Global Compliance (Shenzhen) Co., Ltd.

报告专用章



1. 样品描述 Sample Description			
样品名称 Sample Name	锂离子动力电池 Lithium-ion Power Battery	样品型号 Model Name	10S4P
测试实验室 Testing laboratory	深圳市鑫宇环检测有限公司 Attestation of Global Compliance (Shenzhen) Co., Ltd.		
测试地址 Testing Address	深圳市宝安区西乡街道固戍社区茶西三围工业园区第 1.2.3.4 号 2 号二楼 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong, China		
委托单位 Applicant	深圳市杰特能源科技有限公司 Shenzhen JETECH Energy Technology Co., Ltd.		
委托单位地址 Applicant Address	深圳市龙华新区观澜街道老村社区景田路创新工业园 Z 栋厂房三楼 A 区、B 区 3/F, bldg Z, Chuangxin ind Park, Jingtian RD., Laocun Community, Guanlan, Longhua New Dist., Shenzhen, Guangdong, P.R.China		
生产单位 Manufacturer	深圳市杰特能源科技有限公司 Shenzhen JETECH Energy Technology Co., Ltd.		
生产单位地址 Manufacturer Address	深圳市龙华新区观澜街道老村社区景田路创新工业园 Z 栋厂房三楼 A 区、B 区 3/F, bldg Z, Chuangxin ind Park, Jingtian RD., Laocun Community, Guanlan, Longhua New Dist., Shenzhen, Guangdong, P.R.China		
电芯生产单位 Manufacturer of Cell	---		
用途 Use	---		
电池类型 Battery Type	可充电锂电池组 Rechargeable Li Battery	组成方式 Composing mode	10S4P
标称电压 Nominal Voltage	36V	额定容量 Rated Capacity	10000mAh
瓦时 Watt-hour	360Wh	形状 Form	方形 Prismatic
充电上限电压 Limited Charge Voltage	42V	截止电压 Cut-off Voltage	27.5V
充电电流 Charge Current	2000mA	最大持续充电电流 Max. Continuous Charge Current	5000mA
最大持续放电电流 Max. Continuous Discharge Current	15000mA	充电截止电流 End Charge Current	200mA
电芯型号 Cell Model	INR18650S-2500mAh	电芯容量 Cell Rated Capacity	2500mAh
开始时间 Client Date	2019-07-09	完成时间 Completing Date	2019-07-29



## 2、测试标准 Standard

<United Nations Recommendations on the Transport of Dangerous Goods: Manual of Tests and Criteria>  
《联合国关于危险品运输建议书—试验和标准手册》(ST/SG/AC.10/11/Rev.6)

## 3、测试项目及结论 Test Item And Conclusion

测试项目 Item	测试样品编号 Samples Number	结论 Conclusion
高度模拟 Altitude simulation	Z1~Z4 X1~X4	通过 Pass
温度试验 Thermal test		通过 Pass
振动 Vibration		通过 Pass
冲击 Shock		通过 Pass
外部短路 External Short Circuit		通过 Pass
撞击 Impact	Z9~Z13	通过 Pass
过度充电 Overcharge	Z5~Z8 X5~X8	通过 Pass
强制放电 Forced discharge	Z14~Z23 X9~X18	通过 Pass

送检样品符合《联合国关于危险品运输建议书—试验和标准手册》38.3 章的要求。  
The submitted samples were complied with UN Manual of Tests and Criteria, Part III, sub-section 38.3.


主检人 Tested by	王 明	审核人 Reviewed by	薛 佳 佳	批准人 Approved by	祝志伟
------------------	-----	--------------------	-------	--------------------	-----

### 说明 Notes:

- Z1~Z8: 第一个充放电周期完全充电状态的电池;  
Batteries at first cycle in fully charged states;  
Z9~Z13: 第一个充放电周期50%设计额定容量状态的电池芯;  
Cells at first cycle at 50% of the design rated capacity;  
Z14~Z23: 第一个充放电周期完全放电状态的电池芯;  
Cells at first cycle in fully discharged states;  
X1~X8: 50个充放电周期后完全充电状态的电池;  
Batteries after 50 cycles ending in fully charged states;  
X9~X18: 50个充放电周期后完全放电状态的电池芯。  
Cells after 50 cycles ending in fully discharged states.



#### 4、样品图片 Sample Photos

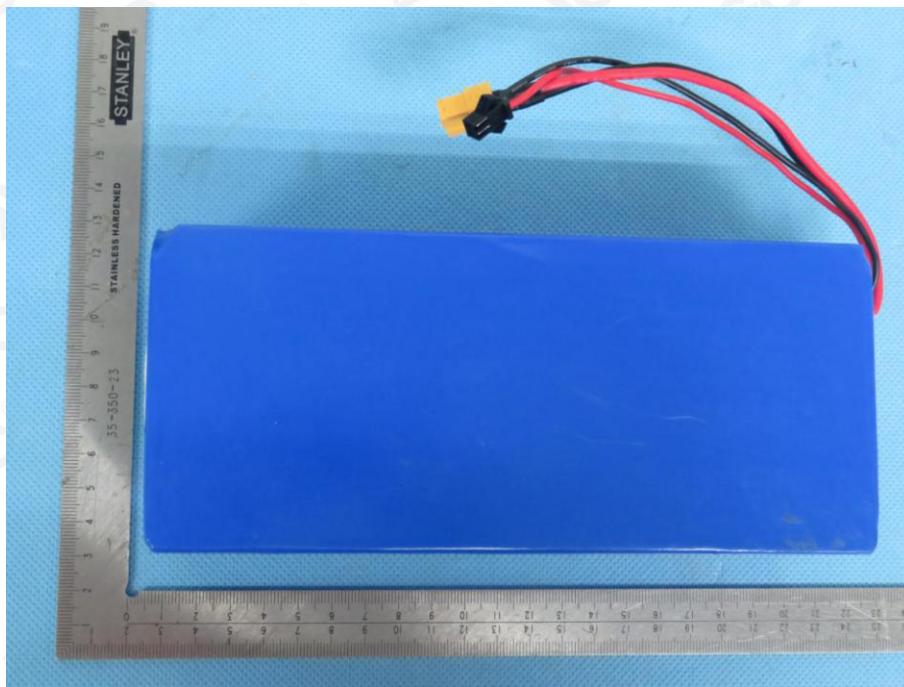



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

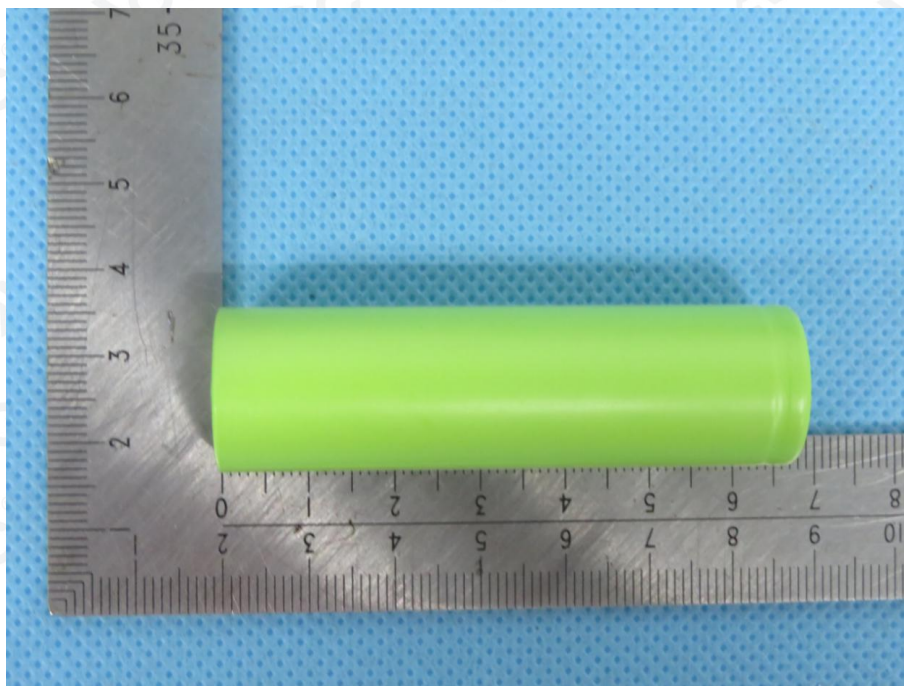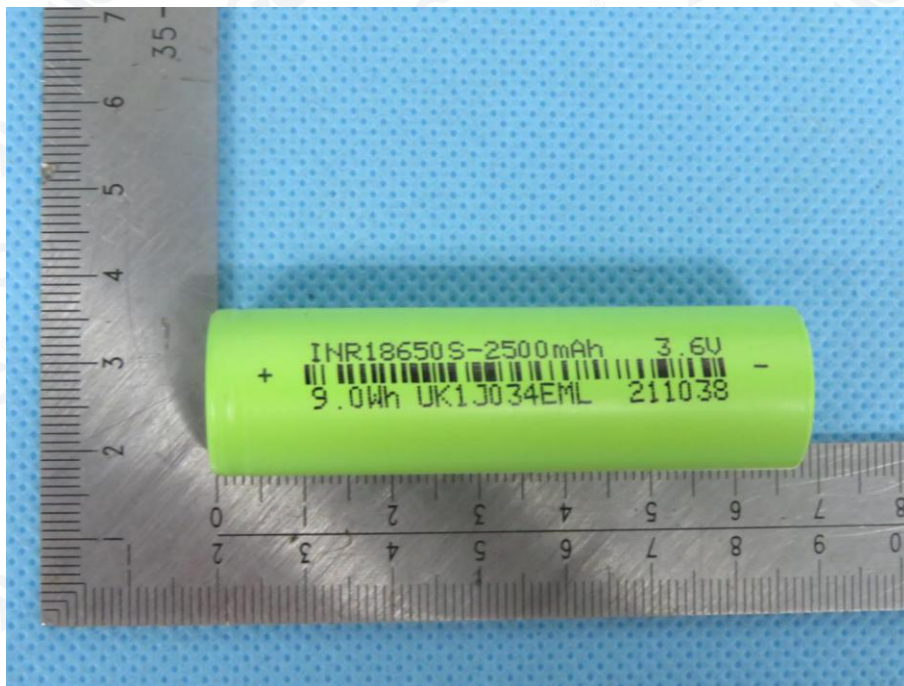

仅对原报告照片中的样品负责  
Authenticate the photo on original report only



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

**5、测试方法及判定 Test Method And Verdict**

章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
38.3.4.1	<b>测试 1: 高度模拟</b> <b>Test 1: Altitude simulation</b>	见表 1 See Table 1	P
	试验电池和电池组应压力不大于 11.6kpa 和环境温度为 $20\pm 5^{\circ}\text{C}$ 的条件下贮存不少于 6 个小时。 Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hour at ambient temperature ( $20\pm 5^{\circ}\text{C}$ )	无渗漏, 无排气, 无解体, 无破裂和无起火。 No leakage, no venting, no disassemble, no rupture and no fire.	P
	要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。 Cells and batteries meet this requirement if there is no leakage, no venting, no disassemble, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.		
38.3.4.2	<b>测试 2: 温度试验</b> <b>Test 2: Thermal test</b>	见表 2 See Table 2	P
	试验电池和电池组先在试验温度等于 $72^{\circ}\text{C}\pm 2^{\circ}\text{C}$ 的条件下存放至少 6 小时, 接着再在试验温度等于 $-40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ 的条件下存放至少 6 小时。两个极端试验温度之间的最大时间间隔为 30 分钟。此程序重复进行, 共完成 10 次, 接着将所有试验电池和电池组在环境温度 ( $20^{\circ}\text{C}\pm 5^{\circ}\text{C}$ ) 下存放 24 小时。对于大型电池和电池组, 暴露于极端试验温度的时间至少应为 12 小时。 Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72\pm 2^{\circ}\text{C}$ , followed by storage for at least six hours at a test temperature equal to $-40\pm 2^{\circ}\text{C}$ . The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ( $20 \pm 5^{\circ}\text{C}$ ). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.	无渗漏, 无排气, 无解体, 无破裂和无起火。 No leakage, no venting, no disassemble, no rupture and no fire.	P
	要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。 Cells and batteries meet this requirement if there is no leakage, no venting, no disassemble, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.		



章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
38.3.4.3	<b>测试3: 振动</b> <b>Test 3: Vibration</b>	见表 3 See Table 3	P
	<p>电池和电池组紧固于振动机平台，但不得造成电池变形，并能准确可靠地传播振动。振动应是正弦波形，对数扫描频率在 7 赫兹和 200 赫兹之间，再回到 7 赫兹，跨度为 15 分钟。这一振动过程须对三个互相垂直的电池安装方位的每一方向重复进行 12 次，总共为时 3 小时。其中一个振动方向必须与端面垂直。</p> <p>Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.</p> <p>作对数式频率扫描，对总质量不足 12 千克的电池和电池组（电池和小型电池组），和对 12 千克及更大的电池组（大型电池组）有所不同。</p> <p>The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).</p> <p>对电池和小型电池组：从 7 赫兹开始，保持 <math>1g_n</math> 的最大加速度，直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米（总偏移 1.6 毫米），并增加频率直到最大加速度达到 <math>8g_n</math>（频率约为 50 赫兹）。将最大加速度保持在 <math>8g_n</math> 直到频率增加到 200 赫兹。</p> <p>For cells and small batteries: from 7 Hz a peak acceleration of <math>1g_n</math> is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of <math>8g_n</math> occurs (approximately 50 Hz). A peak acceleration of <math>8g_n</math> is then maintained until the frequency is increased to 200 Hz.</p> <p>对大型电池组：从 7 赫兹开始，保持 <math>1g_n</math> 的最大加速度，直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米（总偏移 1.6 毫米），并增加频率直到最大加速度达到 <math>2g_n</math>（频率约为 25 赫兹）。将最大加速度保持在 <math>2g_n</math> 直到频率增加到 200 赫兹。</p> <p>For large batteries: from 7 Hz to a peak acceleration of <math>1g_n</math> is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of <math>2g_n</math> occurs (approximately 25 Hz). A peak acceleration of <math>2g_n</math> is then maintained until the frequency is increased to 200 Hz.</p> <p>要求电池和电池组试验中和试验后无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电池或电池组在第三个垂直安装方位上的试验后立即测得的开路电压不小于在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。</p>	<p>无渗漏， 无排气，无解体，无破裂和无起火。</p> <p>No leakage, no venting, no disassemble, no rupture and no fire.</p>	P



章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict									
	Cells and batteries meet this requirement if there is no leakage, no venting, no disassemble, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.											
38.3.4.4	<b>测试4: 冲击</b> <b>Test 4: Shock</b>	见表 4 See Table 4	P									
	<p>试验电池和电池组用坚硬支架紧固在试验装置上，支架支撑着每个试验电池组的所有安装面。</p> <p>Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.</p> <p>每个电池需经受最大加速度<math>150g_n</math>和脉冲持续时间6毫秒的半正弦波冲击。针对大型电池需经受最大加速度<math>50g_n</math>和脉冲持续时间11毫秒的半正弦波冲击。</p> <p>Each cell shall be subjected to a half-sine shock of peak acceleration of <math>150g_n</math> and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of <math>50g_n</math> and pulse duration of 11 milliseconds.</p> <p>每个电池组应根据电池组的质量而受到峰值加速度的半正弦波冲击。对于小型电池组的脉冲持续时间应6毫秒，对于大型电池组的脉冲持续时间应为11毫秒，下面的公式用于计算适当的最小峰值加速度。</p> <table border="1" data-bbox="338 1198 1141 1731"> <thead> <tr> <th>电池 Battery</th> <th>最小峰值加速度 Minimum peak acceleration</th> <th>脉冲持续时间 Pulse duration</th> </tr> </thead> <tbody> <tr> <td>小型电池 Small batteries</td> <td> <math>150g_n</math> 或公式结果中的较小值  <math>150g_n</math> or result of formula                      Acceleration (<math>g_n</math>) = <math>\sqrt{\left(\frac{100850}{\text{mass}^*}\right)}</math>                      whichever is smaller                 </td> <td>6毫秒 6ms</td> </tr> <tr> <td>大型电池 Large batteries</td> <td> <math>50g_n</math> 或公式结果中的较小值  <math>50g_n</math> or result of formula                      Acceleration (<math>g_n</math>) = <math>\sqrt{\left(\frac{3000}{\text{mass}^*}\right)}</math>                      whichever is smaller                 </td> <td>11毫秒 11ms</td> </tr> </tbody> </table> <p>* 质量单位用千克计算 Mass is expressed in kilograms.</p> <p>Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.</p>	电池 Battery	最小峰值加速度 Minimum peak acceleration	脉冲持续时间 Pulse duration	小型电池 Small batteries	$150g_n$ 或公式结果中的较小值 $150g_n$ or result of formula Acceleration ( $g_n$ ) = $\sqrt{\left(\frac{100850}{\text{mass}^*}\right)}$ whichever is smaller	6毫秒 6ms	大型电池 Large batteries	$50g_n$ 或公式结果中的较小值 $50g_n$ or result of formula Acceleration ( $g_n$ ) = $\sqrt{\left(\frac{3000}{\text{mass}^*}\right)}$ whichever is smaller	11毫秒 11ms	无渗漏， 无排气，无解体，无破裂和无起火。 No leakage, no venting, no disassemble, no rupture and no fire.	P
电池 Battery	最小峰值加速度 Minimum peak acceleration	脉冲持续时间 Pulse duration										
小型电池 Small batteries	$150g_n$ 或公式结果中的较小值 $150g_n$ or result of formula Acceleration ( $g_n$ ) = $\sqrt{\left(\frac{100850}{\text{mass}^*}\right)}$ whichever is smaller	6毫秒 6ms										
大型电池 Large batteries	$50g_n$ 或公式结果中的较小值 $50g_n$ or result of formula Acceleration ( $g_n$ ) = $\sqrt{\left(\frac{3000}{\text{mass}^*}\right)}$ whichever is smaller	11毫秒 11ms										





章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
	<p>每个电池或电池组需在三个互相垂直的安装方位的正方向经受三次冲击，接着在反方向经受三次冲击，总共经受18次冲击。</p> <p>Each cell or battery is subjected to three shocks in the positive direction followed by three shocks in the negative direction of each of three mutually perpendicular mounting positions of the cell for a total of 18 shocks.</p> <p>要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。</p> <p>Cells and batteries meet this requirement if there is no leakage, no venting, no disassemble, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>		
38.3.4.5	<p><b>测试 5: 外部短路</b> <b>Test 5: External Short Circuit</b></p>	见表 5 See Table 5	P
	<p>待测试的电池或电池组应加热一段时间，以使其外表面温度达到均匀稳定的 <math>57 \pm 4^{\circ}\text{C}</math> 的温度。加热时间取决于电池或电池组的大小和设计，并应进行评估和记录。如果这种评估是不可行的，对于小型电池和小型电池组至少在 <math>57 \pm 4^{\circ}\text{C}</math> 的环境下存放 6 小时，对于大型电池和大型电池组至少在 <math>57 \pm 4^{\circ}\text{C}</math> 的环境下存放 12 小时。然后电池或电池组在 <math>57 \pm 4^{\circ}\text{C}</math> 的环境中，应接受一个外部总阻值小于 0.1 欧姆的短路条件。</p> <p>The cell or battery to be tested shall be shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of <math>57 \pm 4^{\circ}\text{C}</math>, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at <math>57 \pm 4^{\circ}\text{C}</math> shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm.</p> <p>这一短路条件应在电池或电池组的外壳温度回到 <math>57 \pm 4^{\circ}\text{C}</math> 后继续短路 1 小时，或对于大型电池组其外壳温度已下降了一半的最大升温，并保持低于该值。短路和冷却过程至少在环境温度中进行。</p> <p>This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to <math>57 \pm 4^{\circ}\text{C}</math>, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature.</p>	无解体， 无破裂，无起火。No disassemble , no rupture and no fire.	P



章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
	<p>要求电池和电池组外壳温度不超过 170℃，并且在试验过程中及试验后 6 小时内无解体，无破裂，无起火。</p> <p>Cells and batteries meet this requirement if their external temperature does not exceed 170℃ and there is no disassemble, no rupture and no fire within six hours of this test.</p>		
38.3.4.6	<p><b>测试 6: 撞击/挤压</b> <b>Test 6: Impact / Crush</b></p>	见表 6 See Table 6	P
	<p><b>撞击</b> (适用于直径大于等于 18 毫米的圆柱形电池) Impact (applicable to cylindrical cells not less than 18mm in diameter)</p> <p>试样电池或元件电池放在平坦光滑的表面上，一根 316 型不锈钢棒横放在试样中心，钢棒直径 15.8 毫米±0.1 毫米，长度至少 6 厘米，或电池最长端的尺度，取二者之长者。将一块 9.1 千克±0.1 千克的重锤从 61±2.5 厘米高处跌落到钢棒和试样交叉处，使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿与水平支撑表面呈 90 度落下。</p> <p>The test sample cell or component cell is to be placed on a flat smooth surface. A 15.8mm±0.1mm diameter, at least 6cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 kg ± 0.1kg mass is to be dropped from a height of 61 ± 2.5 cm at the intersection of the bar and sample in a controlled manner using a near friction less, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.</p> <p>接受撞击的试样，纵轴应与平坦表面平行并与横放在试样中心的直径 15.8±0.1 毫米弯曲表面的纵轴垂直。每一试样只经受一次撞击。</p> <p>The test samples is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8mm±0.1mm diameter curved surface lying across the centre of the test samples. Each sample is to be subjected to only a single impact.</p>	无解体，无破裂，无起火。No disassemble, no rupture and no fire.	P
	<p>要求电池和电池组外壳温度不超过 170℃，并且在试验过程中及试验后 6 小时内无解体，无起火。</p> <p>Cells and component cells meet this requirement if their external temperature does not exceed 170℃ and there is no disassemble and no fire during the test and within six hours after this test.</p>		
	<p><b>挤压</b> (适用于棱柱形、袋装、硬币/纽扣电池和直径小于 18 毫米的圆柱形电池) Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18mm in diameter)</p> <p>将电池或元件电池放在两个平面之间挤压，挤压力度逐渐加大，在第一个接触点上的速度大约为 1.5 厘米/秒。挤压持续进行，直到出现以下三种情况之一：</p>	N/A	N/A



章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
	<p>(a) 施加的力量达到13千牛±0.78千牛； (b) 电池的电压下降至少100毫伏；或 (c) 电池变形达原始厚度的50%或以上。</p> <p>A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.</p> <p>(a) The applied force reaches 13kN±0.78kN; (b) The voltage of the cell drops by at least 100mV; or (c) The cell is deformed by 50% or more of its original thickness.</p> <p>一旦达到最大压力、电压下降 100 毫伏或更多，或电池变形至少达原厚度的 50%，即可解除压力。</p> <p>Once the maximum pressure has been obtained, the voltage drops by 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.</p> <p>棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币形电池应从其平坦表面施压。圆柱形电池应从与纵轴垂直的方向施压。</p> <p>A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.</p> <p>每个试样电池或元件电池只做一次挤压试验。试样应继续观察 6 小时。试验应使用之前未做过其他试验的电池或元件电池进行。</p> <p>Each test cell or component cell is to be subjected to one crush only. The test Samples shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.</p> <p>要求电池和电池组外壳温度不超过170℃，并且在试验过程中及试验后6小时内无解体，无起火。</p> <p>Cells and component cells meet this requirement if their external temperature does not exceed 170℃ and there is no disassemble and no fire during the test and within six hours after this test.</p>		
38.3.4.7	<p><b>测试 7: 过充电</b> <b>Test 7: Overcharge</b></p>	见表 7 See Table 7	P
	<p>充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下：</p> <p>(a) 制造商建议的充电电压不大于18伏时，试验的最小电压应是电池组最大充电电压的两倍或22伏两者中的较小者； (b) 制造商建议的充电电压大于18伏时，试验的最小电压应为最大充电电压的1.2倍。</p> <p>试验应在环境温度下进行，进行试验的时间应为 24 小时。</p> <p>The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test</p>	无分解， 无起火。No disassemble and no fire.	P



章节 Clause	标准要求 Requirements	测试结果 Result	判定 Verdict
	<p>shall be as follows:</p> <p>(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.</p> <p>(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.</p> <p>Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.</p>		
	<p>要求充电电池组在试验过程中和试验后 7 天内无解体, 无起火。 Rechargeable batteries meet this requirement if there is no disassemble and no fire during the test and within seven days after the test.</p>		
38.3.4.8	<p><b>测试 8: 强制放电</b> <b>Test 8: Forced discharge</b></p>	<p>见表 8 See Table 8</p>	P
	<p>每个电池应在环境温度下与 12V 直流电源上进行强制放电, 此直流电源串联在起始电流等于制造商给定的最大放电电流条件下强制放电。</p> <p>Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.</p> <p>将适当大小和额定值的电阻负荷与试验电池串联, 计算得出给定的放电电流。对每个电池进行强制放电, 放电时间 (小时) 应等于其额定容量除以初始试验电流 (安培)。</p> <p>The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).</p>	<p>无分解, 无起火。No disassemble and no fire.</p>	P
	<p>要求原电池或充电电池在试验过程中和试验后 7 天内无解体, 无起火。 Primary or rechargeable cells meet this requirement if there is no disassemble and no fire during the test and within seven days after the test.</p>		



**6、测试数据 Test Data**

表 1 Table 1	高度模拟 Altitude simulation						P
样品 编号 Sample No.	质量 Mass (g)		质量亏损 Mass loss (%)	电压 Voltage (V)		电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 Whether leakage, venting, disassemble, rupture, fire (Y/N)
	测试前 Pre-test	测试后 After test		测试前 Pre-test	测试后 After test		
Z1	2046.7	2046.6	0.005	41.79	41.74	0.12	N
Z2	2044.2	2044.2	0.000	41.78	41.75	0.07	N
Z3	2045.9	2045.9	0.000	41.81	41.76	0.12	N
Z4	2046.8	2046.7	0.005	41.79	41.76	0.07	N
X1	2045.5	2045.5	0.000	41.80	41.75	0.12	N
X2	2044.6	2044.5	0.005	41.79	41.76	0.07	N
X3	2045.1	2045.1	0.000	41.81	41.74	0.17	N
X4	2045.7	2045.7	0.000	41.78	41.75	0.07	N

表 2 Table 2	温度试验 Thermal test						P
样品 编号 Sample No.	质量 Mass (g)		质量亏损 Mass loss (%)	电压 Voltage (V)		电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 Whether leakage, venting, disassemble, rupture, fire (Y/N)
	测试前 Pre-test	测试后 After test		测试前 Pre-test	测试后 After test		
Z1	2046.6	2046.4	0.010	41.74	41.34	0.96	N
Z2	2044.2	2043.9	0.015	41.75	41.33	1.01	N
Z3	2045.9	2045.7	0.010	41.76	41.34	1.01	N
Z4	2046.7	2046.4	0.015	41.76	41.35	0.98	N
X1	2045.5	2045.3	0.010	41.75	41.34	0.98	N
X2	2044.5	2044.3	0.010	41.76	41.33	1.03	N
X3	2045.1	2044.9	0.010	41.74	41.34	0.96	N
X4	2045.7	2045.5	0.010	41.75	41.33	1.01	N



表 3 Table 3		振动 Vibration					P
样品编号 Sample No.	质量 Mass (g)		质量亏损 Mass loss (%)	电压 Voltage (V)		电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 Whether leakage, venting, disassemble, rupture, fire (Y/N)
	测试前 Pre-test	测试后 After test		测试前 Pre-test	测试后 After test		
Z1	2046.4	2046.4	0.000	41.34	41.31	0.07	N
Z2	2043.9	2043.9	0.000	41.33	41.32	0.02	N
Z3	2045.7	2045.7	0.000	41.34	41.32	0.05	N
Z4	2046.4	2046.3	0.005	41.35	41.33	0.05	N
X1	2045.3	2045.2	0.005	41.34	41.32	0.05	N
X2	2044.3	2044.3	0.000	41.33	41.31	0.05	N
X3	2044.9	2044.8	0.005	41.34	41.32	0.05	N
X4	2045.5	2045.5	0.000	41.33	41.30	0.07	N

表 4 Table 4		冲击 Shock					P
样品编号 Sample No.	质量 Mass (g)		质量亏损 Mass loss (%)	电压 Voltage (V)		电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 Whether leakage, venting, disassemble, rupture, fire (Y/N)
	测试前 Pre-test	测试后 After test		测试前 Pre-test	测试后 After test		
Z1	2046.4	2046.4	0.000	41.31	41.30	0.02	N
Z2	2043.9	2043.9	0.000	41.32	41.32	0.00	N
Z3	2045.7	2045.7	0.000	41.32	41.31	0.02	N
Z4	2046.3	2046.3	0.000	41.33	41.33	0.00	N
X1	2045.2	2045.2	0.000	41.32	41.30	0.05	N
X2	2044.3	2044.3	0.000	41.31	41.30	0.02	N
X3	2044.8	2044.7	0.005	41.32	41.31	0.02	N
X4	2045.5	2045.5	0.000	41.30	41.30	0.00	N



表 5 Table 5	外短路 External short circuit	P
样品编号 Sample No.	最高温度 Peak temperature (°C)	有无解体, 破裂, 起火 Whether disassemble, rupture, fire (Y/N)
Z1	57.6	N
Z2	57.7	N
Z3	57.6	N
Z4	57.5	N
X1	57.7	N
X2	57.6	N
X3	57.8	N
X4	57.9	N

表 6 Table 6	撞击 Impact	P
样品编号 Sample No.	最高温度 Peak temperature (°C)	有无解体, 起火 Whether disassemble, fire (Y/N)
Z9	26.5	N
Z10	26.8	N
Z11	26.7	N
Z12	26.6	N
Z13	26.7	N

表 7 Table 7	过度充电 Overcharge	P
样品编号 Sample No.	有无解体, 起火 Whether disassemble, fire (Y/N)	
Z5	N	
Z6	N	
Z7	N	
Z8	N	
X5	N	
X6	N	
X7	N	
X8	N	

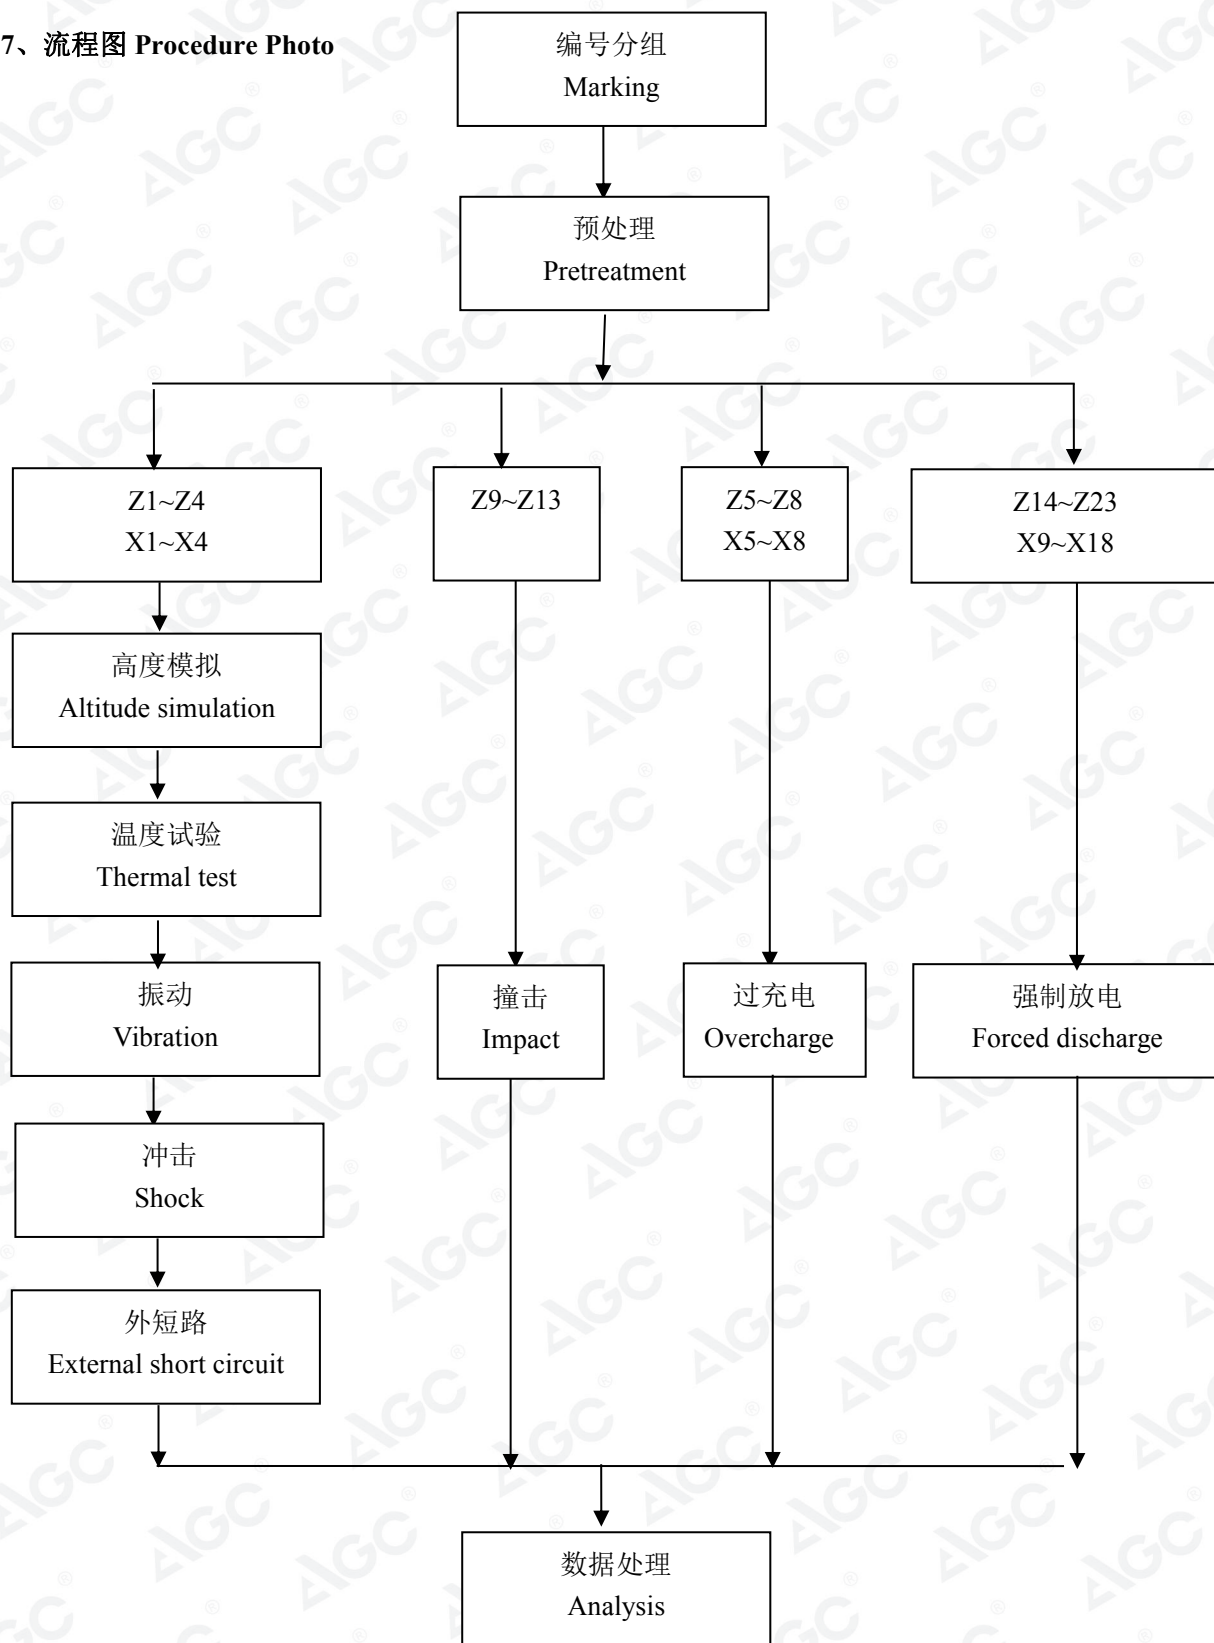


表 8 Table 8	强制放电 Forced discharge	P
样品编号 Sample No.	有无解体, 起火 Whether disassemble, fire (Y/N)	
Z14		N
Z15		N
Z16		N
Z17		N
Z18		N
Z19		N
Z20		N
Z21		N
Z22		N
Z23		N
X9		N
X10		N
X11		N
X12		N
X13		N
X14		N
X15		N
X16		N
X17		N
X18		N





7、流程图 Procedure Photo



## 8、测试设备 Test equipment

AGC-SA-E074	电子秤 Electronic steelyard
AGC-BT-E093	数字万用表 Digital multimeter
AGC-BT-E062	高性能电池测试系统 Battery Testing System
AGC-BT-E015	真空试验箱 Vacuum chamber
AGC-BT-E074	快速温变试验箱 Temperature circulation chamber
AGC-BT-E070	振动试验台 Vibration test instrument
AGC-RE-E062	冲击试验台 Impact test instrument
AGC-BT-E009	电池短路试验机 Battery short circuit testing instrument
AGC-BT-E010	电池短路温控箱 Battery short circuit temperature instrument
AGC-BT-E012	电池冲击试验箱 Battery impact test instrument
AGC-BT-E001	电池测试系统 Battery test system
AGC-BT-E035	温度记录仪 Temperature recorder
AGC-BT-E045~E052	直流稳压电源 DC power supply
AGC-BT-E053~E056	直流稳压电源 DC power supply



## 声明

### Statement

1. 本报告无本公司报告专用章和批准人签章无效。

This report is invalid without the special seal for report of AGC and the signatures of approver.

2. 本报告涂改和删除无效。

This report is invalid if it is blotted out and deleted.

3. 委托单位对检测结果有异议，应于收到报告之日起 15 日内向我司提出。

If the applicant has any questions about results, shall submit to AGC within 15 days.

4. 本报告仅对客户所送样品负责。

This report is responsible for the sample provided by the client only.

5. 未经本公司许可，不得部分复制、摘自本报告内容。

This report shall not be reproduced except in full, or extracted without the written approval of AGC.

6. 本报告复印件未加盖红章无效。

This report photocopy is invalid without the red chop.

---报告结束---

\*\*\*End of report\*\*\*

